



Correlation between *P*-wave velocity and some mechanical properties for sedimentary rocks

by R. Altindag*

Synopsis

Engineers and researchers need to estimate the mechanical properties of rocks from *P*-wave velocity. In previous studies, the researchers have investigated either the limited values or all the data belonging to sedimentary, igneous, and metamorphic rocks together in the same statistical analysis. In this study, the raw data pertaining to only sedimentary rocks was taken from previous studies and evaluated. For this purpose, a total of 97 samples of sedimentary rock types were subjected to statistical analysis. First, the relationships between *P*-wave velocity and physical-mechanical properties were investigated by simple regression analysis. All the data were then subjected to multi-regression analysis. Some empirical equations with high correlation coefficients were derived for rock engineers. The equations obtained from the analyses are compared with previous equations found in literature.

Keywords

P-wave velocity, mechanical properties, sedimentary rocks, mechanical properties, brittleness.

Introduction

Seismic techniques, which are known as non-destructive geophysical methods, are commonly used by engineers working in various fields such as mining, civil, and geotechnical engineering. They are frequently employed to investigate certain properties of rocks. Ultrasonic measurements can be applied in various application areas such as rockbolt reinforcement¹, blasting efficiencies in the rock mass², the determination of degree of rock weathering³, determination of deformation and stress on rock masses^{4,5}, and rock mass characterization^{6,7}. A number of studies⁸⁻¹³ investigating ultrasonic propagation in fractured rock have been carried out. Some researchers¹⁴⁻¹⁶ used the *P*-wave velocity for the estimation of weathering depth of building stones. Many researchers have found that *P*-wave velocity is closely related to physical and mechanical properties of rocks¹⁷⁻²⁵.

The main factors that influence *P*-wave velocity in rocks are lithology, texture, density, porosity, anisotropy, grain size and shape, water contact, stress, temperature, weathering, alteration zones, pores and microcracks, bedding planes, and joint properties (roughness, filling materials, water, dip and strike, etc.).

The relationships between *P*-wave velocity and rock density have been investigated by various researchers²⁶⁻²⁸ who have reported an increase in the density as the velocity increased. The influence of microcracks on *P*-wave velocity distribution has been studied by Babuska *et al.*²⁹ and Jech *et al.*³⁰. The effect of crystallographic preferred orientation of rock-forming minerals on *P*-wave velocities was examined by various researchers. The effects of fracture roughness on *P*-wave velocity for granite, marble, and travertine was studied by Kahraman³¹, who stated that *P*-wave velocity decreased as the fracture roughness coefficient values increased. Kahraman³² derived empirical equations in order to predict *P*-wave velocity of wet rock from the *P*-wave velocity of dry rock.

Singh and Kripamoy³³ revealed that *P*-wave velocity and uniaxial compressive strength (UCS) decreased as the quartz content increased, and decreased as the moisture content increased. They also reported a decrease in *P*-wave velocity as the silica content increased. Some of the empirical relationships between *P*-wave velocity and the UCS for different rock types found in the literature are summarized in Table I.

* S.D.U. Engineering and Architecture Faculty, Department of Mining Engineering, Isparta, Turkey..

© The Southern African Institute of Mining and Metallurgy, 2012. SA ISSN 0038-223X/3.00 + 0.00. Paper received Nov. 2009; revised paper received Jun. 2011.

Correlation between *P*-wave velocity and some mechanical properties

Table I

Some empirical relationships between UCS and *P*-wave velocity from previous studies

Equations	Correlation coefficient (r)	Units and notations	Rock type	Number of data	References
UCS = ax + b	0.85	--	Sandstones	--	[64]
UCS = 0.0642 <i>V_p</i> - 117.99, (MPa)	0.90	<i>V_p</i> : m/s	Sandstone, coal, quartz mica schist, phyllite, basalt	43	[65]
UCS = 35.54 <i>V_p</i> - 55	0.80	--	Granitic rocks	19	[66]
UCS = 56.71 <i>V_p</i> - 192.93, (MPa)	very small	--	Cement mortar, sandstone, limestone	75	[67]
UCS = a <i>V_p</i> ^b	0.94	--	A wide range of British rock types	150	[68]
UCS = 9.95 <i>V_p</i> ^{1.21} , (MPa)	0.83	<i>V_p</i> : km/s	Marl, limestone, dolomite, sandstone, hematite, serpentine, diabase, tuff	48	[15]
<i>V_p</i> = 0.00317 UCS + 2.0195	0.80	--	--	--	[24]
UCS = 0.78 e ^{0.88<i>V_p</i>}	0.73	<i>V_p</i> : km/s	Volcanic group	--	[69]
UCS = 0.78 <i>V_p</i> ^{0.88}	0.73	<i>V_p</i> : km/s	Volcanic group	--	
UCS = 0.0407 <i>V_p</i> - 36.31, (N/mm ²)	0.85	--	--	19	[70]
UCS = 0.004 <i>V_p</i> ^{1.247} , (MPa)	0.85	<i>V_p</i> : m/s	Granites	9	[71]
UCS = k ρ <i>V_p</i> ² + A, (kg/cm ²)		ρ: g/cm ³ , <i>V_p</i> : km/s	--	--	[22]
UCS = 0.036 <i>V_p</i> - 31.18, (MPa)		<i>V_p</i> : m/s	--	--	[72]
UCS = 0.1564 <i>V_p</i> - 692.41, (MPa)	0.90	<i>V_p</i> : m/s	Sandstones	9	[73]
UCS = 0.0144 <i>V_p</i> - 24.856, (MPa)	0.71	<i>V_p</i> : m/s	Sandstones	24	
UCS = 7.1912 <i>V_p</i> + 26.258, (MPa)	0.57	<i>V_p</i> : km/s	Sandstone, gravel stone, limestone, mudstone, shale	8	[74]
UCS = 21.677 <i>V_p</i> + 21.427	0.95	<i>V_p</i> : km/s	Limestone, marble, dolomitic limestone, tuff, basalt	8	[75]
UCS = 0.0188 <i>V_p</i> + 0.0648	0.95	<i>V_p</i> : km/s	Sandstone	--	[76]
UCS = 2,304 <i>V_p</i> ^{2.4315}	0.97	<i>V_p</i> : km/s	Diorite, quartzite, sandstone, limestone, marble, granodiorite, basalt, travertine, trachyte, tuff, andesite.	19	[77]
UCS = 12.746 <i>V_p</i> ^{1.194}	0.79	<i>V_p</i> : km/s	Limestone, sandstone, travertine, marl,	97	This Study
UCS = - 7.155 + 6.194 <i>V_p</i> + 9.774 <i>TS</i>	0.88	<i>V_p</i> : km/s	dolomite, mudrock-shale, slate, siltstone	43	
UCS = - 10.029 + 5.734 <i>V_p</i> + 10.876 <i>TS</i> - 2.408 <i>Is</i>	0.90	<i>V_p</i> : km/s		26	

The goal of this study is to investigate the relationships between *P*-wave velocity and certain physico-mechanical rock properties such as unit weight, porosity, shore hardness, brittleness, UCS, tensile strength, point load index, and modulus of elasticity, considering the sedimentary rocks only.

Sampling of data

It was noticed in some of the previous studies that the rocks had all been subjected to the same statistical analysis, regardless of the differences in their geological origins. However, in this study, only the raw data of sedimentary rocks obtained from previous studies was taken into account in the statistical analysis. The properties of the rock samples employed in statistical analyses are illustrated in Table II.

Brittleness concepts

Brittleness has become an important rock property. Nevertheless, no standardized and universally accepted brittleness concept or measurement method defining or measuring the rock brittleness has yet been stated. Different researchers mean, express, and use the concept differently for different purposes.

The ratio H/K_c , where H is the hardness (resistance to deformation) and K_c is the toughness (resistance to fracture), is proposed as the index of brittleness³⁴. Quinn and Quinn³⁵

have studied on ceramics and proposed an index of brittleness, $B \equiv (HE)/K_1c^2$, using hardness, Young's modulus, and fracture toughness. Determination of brittleness is largely empirical. Usually, brittleness measures the relative susceptibility of a material to two competing mechanical responses.

Morley³⁶ and Hetenyi³⁷ define brittleness as the lack of ductility. Ramsey³⁸ expresses brittleness as follows: 'When the internal cohesion of rocks is broken, the rocks are said to be brittle'. Obert and Duvall³⁹ described brittleness as follows: 'materials such as cast iron and many rocks usually terminate by fracture at or only slightly beyond the yield stress'. Brittleness is defined as the property of materials that rupture or fracture with little or no plastic flow⁴⁰. However, it may be stated that following phenomena may be observed⁴¹ as the brittleness increases:

- Low values of elongation
- Fracture failure
- Formation of fines
- Higher ratio of compressive to tensile strength
- Higher resilience
- Higher angle of internal friction
- Formation of cracks in indentation.

Some brittleness index definitions obtained from stress-strain curves were introduced and used in literature⁴²⁻⁴⁴. A simple index of brittleness is the ratio of compressive strength to tensile strength, ($B_1 = \sigma_c/\sigma_t$). This definition is

Correlation between *P*-wave velocity and some mechanical properties

Table II
Physical and mechanical properties of rocks

Rock type	UCS (MPa)	TS (MPa)	Point load index, <i>I</i> _s (MPa)	<i>V</i> _p (km/s)	Modulus of elasticity (GPa)	Brittleness*			References
						<i>B</i> ₁	<i>B</i> ₂	<i>B</i> ₃	
Sandstone	58.14	3.04		2.69	6.08	19.13	0.90	9.40	[78]
Sandstone	63.82	4.31		2.42	5.41	14.81	0.87	11.73	
Limestone	103.3	6.08		6.22	13.31	16.99	0.89	17.72	
Limestone	126.67	7.94		6.27	13.70	15.95	0.88	22.42	
Limestone	118.24	7.35		6.18	13.95	16.09	0.88	20.85	
Limestone	106.86	5.49		6.18	13.18	19.46	0.90	17.13	
Limestone	78.73	6.37		5.84	11.51	12.36	0.85	15.84	
Limestone	84.41	6.86		6.2	11.47	12.30	0.85	17.02	
Limestone	46.32		4.91	5.78	24.11				[79]
Limestone	58.02		4.36	5.75	23.21				
Limestone	51.2		4.95	5.13	23.98				
Limestone	50.33		3.72	3.52	8.00				
Limestone	11.5		3.75	3.74	7.60				
Limestone	62.97		3.594	4.753					[67]
Limestone	63.7		3.86	4.799					
Limestone	74.07		3.94	4.866					
Limestone	74.11		4.05	4.869					
Limestone	74.93		4.408	5.109					
Sandstone	82.66		7.425	4.911					
Sandstone	85.25		8.5	4.926					
Sandstone	97.94		9.5	4.973					
Sandstone	105.42		11.29	4.979					
Sandstone	105.47		11.356	5.007					
Marl	24.9	3.56	0.76			6.99	0.75	6.66	[80]
Marl	34	7.9	1.5			4.30	0.62	11.59	
Marl	16.9	2.13	0.46			7.93	0.78	4.24	
Marl	24.8	2.29	0.72			10.83	0.83	5.33	
Clayey marl	2.7	0.06	0.07			45.00	0.96	0.28	
Marl	23.8	6.03	1.05			3.95	0.60	8.47	
Sandstone	43.2	3			15.4	14.40	0.87	8.05	[81]
Sandstone	64.53	4.34			22.5	14.87	0.87	11.83	
Limestone	68.92	3.93		4.45	30.29	17.54	0.89	11.64	[82]
Limestone	115.79	8.41		6.13	61.95	13.77	0.86	22.07	
Limestone	121.8		5.17	5.73	40.42				[83]
Limestone	99		4.61	4.99	30.97				
Limestone	90.6		4.29	3.98	19.74				
Limestone	74.2		2.24	3.21	16.68				
Limestone	138.1		5.77	6.75	46.23				
Limestone	134.2		5.46	6.08	45.48				
Limestone	109.1		5.07	5.86	38.06				
Limestone	92.4		4.3	4.84	34.16				
Limestone	118.2		4.85	5.94	46.81				
Limestone	100.5		3.89	5.59	36.51				
Limestone	131.6		6.32	6.2	41.56				
Limestone	114		4.86	5.55	42.64				
Limestone	76		1.74	3.6	18.58				
Limestone	111		4.42	4.99	44.3				
Limestone	93.7		3.4	4.67	31.6				
Limestone	86.4		3.55	3.88	24.75				
Limestone	124.8		6.3	6.02	41.46				
Limestone	81.6		2.61	3.47	18.95				
Limestone	90		3.31	3.62	17.62				
Limestone	85.8		3.54	3.52	16.77				
Mudrock-Shale	54.37	4.67	2.457	2.548	5.158	11.64	0.84	11.27	[84]
Marl	24.93	3.56	0.47	2.33	5.19	7.00	0.75	6.66	[85]
Marl	23.4	2.85	0.44	2.44	3.3	8.21	0.78	5.77	
Marl	24.8	2.29	0.72	2.43	8.37	10.83	0.83	5.33	
Limestone	163	10.1	4.1	5.69	19.3	16.14	0.88	28.69	[77]
Sandstone	160	12	4	5.18	20.7	13.33	0.86	30.98	
Limestone	127	10.3	3	6	19.7	12.33	0.85	25.57	
Sandstone	122	10.3	3.3	4.75	18.1	11.84	0.84	25.07	
Limestone	112	9.8	2.2	5.84	15.9	11.43	0.84	23.43	
Sandstone	111	9.2	2.6	4.58	13.2	12.07	0.85	22.60	
Travertine	62	1.7	1.7	4.5	13	36.47	0.95	7.26	
Marl	64.9	4.4	3	3.4	4.758	14.75	0.87	11.95	[86]
Marl	11.4	1	0.8	1	0.241	11.40	0.84	2.39	
Marl	21.4	2.2	1.7	1	1.595	9.73	0.81	4.85	
Marl	13.5	1.5	1.4	1.5	0.98	9.00	0.80	3.18	
Limestone	123.8	6.6	5.3	5.3	10.682	18.76	0.90	20.21	
Limestone	45.1	6	4.6	3.3	22.419	7.52	0.77	11.63	
Sandstone	70.5	5.5	6.3	3.7	13.855	12.82	0.86	13.92	
Limestone	42.1	6	4.4	4.7	16.757	7.02	0.75	11.24	
Sandstone	45.2	5.8	3.6	4.5	11.092	7.79	0.77	11.45	
Dolomite	68	6	3.5	6.3	6.83	11.33	0.84	14.28	
Limestone	51.3	7	4.6	5.4	7.193	7.33	0.76	13.40	
Marl	39.5	5.2	2.7	3.1	4.06	7.60	0.77	10.13	
Limestone	15.7	0.9	1.1	2.2	0.79	17.44	0.89	2.66	
Limestone	85.2	9.1	8	5.5	20.253	9.36	0.81	19.69	
Limestone	70.56	5.5	3.9	4	12.517	12.83	0.86	13.93	
Limestone	49.7	7.75	-	-	23.1	6.41	0.73	13.88	[87]
Limestone	53.5	5.5	-	-	19.6	9.73	0.81	12.13	
Limestone	85.6	8.45	-	-	24.2	10.13	0.82	19.02	
Limestone	87.2	7.4	-	-	23.9	11.78	0.84	17.96	
Sandstone	102.94	11.74	9.41	-	48.7	8.77	0.80	24.58	[88]
Limestone	83.63	4.77	6.28	-	15.25	17.53	0.89	14.12	
Claystone	57.9	5.6	-	-	-	10.34	0.82	12.73	[89]
Sandstone	113.6	6.6	-	3.74	17	17.21	0.89	19.36	
Sandstone	87.4	8.3	-	5.2	33.3	10.53	0.83	19.04	
Siltstone	58	5.3	-	4.95	30	10.94	0.83	12.40	
Sandstone	173.7	11.6	-	5.33	28	14.97	0.87	31.74	
Slate	150	-	-	5.046	-	-	-	-	[90]
Slate	181	-	-	4.743	-	-	-	-	
Limestone	68	-	-	5.036	-	-	-	-	
Sandstone	64.7	6.3	-	3.148	-	10.27	0.82	14.28	
Sandstone	44.1	2	-	2.582	12.5	22.05	0.91	6.64	[91]
Sandstone	36.6	0.9	-	2.385	14	40.67	0.95	4.06	
Sandstone	35.1	1.8	-	3.26	7.5	19.50	0.90	5.62	

* Calculated values by the author

Correlation between *P*-wave velocity and some mechanical properties

used in many studies⁴⁵⁻⁵⁰, although it remains only an indication and there is no physical basis for using the ratio as a brittleness indicator.

Evans and Pomeroy⁵¹ showed theoretically that the impact energy of a cutter pick is inversely proportional to brittleness. Singh⁵² indicated that cuttability, penetrability, and the Protodyakonov strength index of coal strongly depend on the brittleness of coal. Singh⁵³ also showed that a linearly proportional relationship existed between *in situ* specific energy and the brittleness (B_2) of three Utah coals. Goktan⁵⁴ stated that the brittleness concept (B_2) adopted in his study might not be a representative measure of specific energy consumption during rock cutting. Kahraman⁵⁵ statistically investigated the relationships between three different brittleness indices and both drillability and borability using the raw data obtained from the experimental work of different researchers. Altindag⁵⁶⁻⁵⁸ found significant correlations between his proposed new brittleness concept (B_3) and the penetration rate of percussion drills, the drillability index in rotary drilling, and the specific energy in rock cutting. Kahraman and Altindag⁵⁹ correlated fracture toughness values with different brittleness values using the raw data obtained from the experimental works of two researchers. They indicated that the Altindag's brittleness concept (B_3) can be used as a predictive rock property for the estimation of the fracture toughness value. Kahraman *et al.*⁶⁰ found a strong correlation between Los Angeles abrasion loss and the brittleness (B_3) for 26 different rocks. Gunaydin *et al.*⁶¹ reported a very strong correlation between hourly production and the brittleness B_3 , and they emphasised that the brittleness B_3 is the most reliable index among the brittleness indices used in their study. Yilmaz *et al.*⁶² stated that the grain size seems to predominantly influence their relative brittleness index values in granitic rocks. Goktan and Yilmaz⁶³ investigated the relationships between brittleness (B_1) and specific energy (SE) and no meaningful correlations could be found between B_1 and SE. However, after normalization of SE by uniaxial compressive strength and classification of test data for a particular rock group, the correlation is significantly improved.

The brittleness concepts based on the compressive strength and tensile strength in this study are given as follows:

$$B_1 = \frac{\sigma_c}{\sigma_t} \quad [1]$$

$$B_2 = \frac{\sigma_c - \sigma_t}{\sigma_c + \sigma_t} \quad [2]$$

$$B_3 = \sqrt{\frac{\sigma_c \times \sigma_t}{2}}, (MPa) \quad [3]$$

where B_1 , B_2 , and B_3 brittleness indices, σ_c is the uniaxial compressive strength (MPa) and σ_t is the tensile strength (MPa). The calculated values of brittleness for the dataset prepared in this study are displayed in Table II.

Regression analysis applied to rock properties

Many equations, some of which are presented in Table I, are reported in literature to estimate the UCS of rock from the *P*-wave velocity. The majority of the equations yield linear

and power relationships between the UCS and *P*-wave velocity. In each study, the amount of data was limited and the same statistical analysis was applied to various rock types, regardless of the differences in their geological origins. Thus, a concern arises as to the reliability of the empirical equations developed. In this study, only sedimentary rocks were taken into account to improve the reliability of the equations.

Statistical analyses used in this study relying on the relationship between V_p and other intact rock properties were based on the data obtained from different studies. Results of the basic descriptive statistical analysis performed on data set are given in Table III. The boxplot of the dataset is shown in Figure 1.

Simple regression analysis

The raw dataset (Table II) was subjected to least squares regression analysis. Linear ($y = ax+b$), logarithmic ($y = a + \ln x$), exponential ($y = ae^x$), and power ($y = ax^b$) curve fitting approximations were executed and the approximation equations that have the highest correlation coefficient were determined for each regression. A power correlation was found between the UCS and *P*-wave velocity for the entire dataset (Figure 2). The equation of the curve is:

$$UCS = 12.743V_p^{1.194} \quad [4]$$

where UCS is the uniaxial compressive strength (MPa) and V_p is the *P*-wave velocity (km/s). The correlation coefficient of the relationship is 0.76.

A plot of tensile strength vs. V_p is shown in Figure 3. The empirical equation of this relation is:

$$TS = 1.0562V_p^{1.1222} \quad [5]$$

where TS is the tensile strength (MPa) and V_p is the *P*-wave velocity (km/s). The correlation coefficient of the relationship is 0.77.

In Figure 4, a power relationship between point load index and *P*-wave velocity is shown. The equation of the curve is:

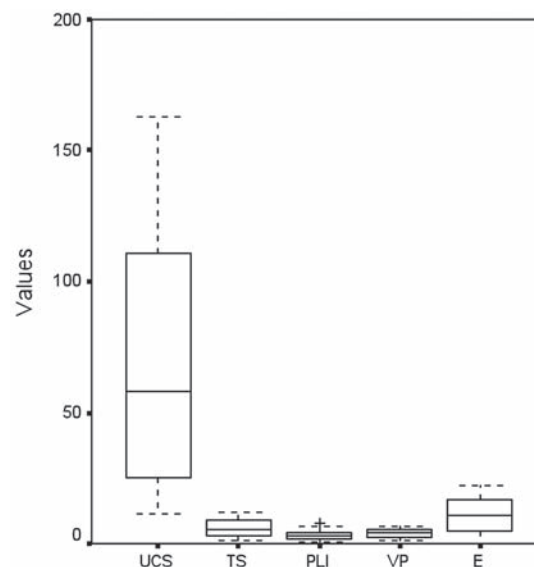


Figure1—Boxplot of the data set

Correlation between *P*-wave velocity and some mechanical properties

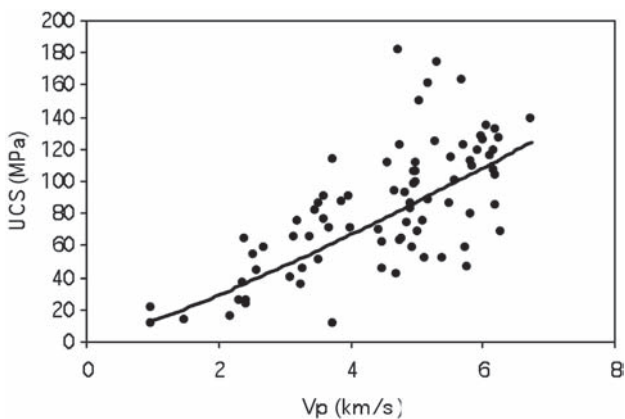


Figure 2—The relationship between the *P*-wave velocity and UCS of rocks

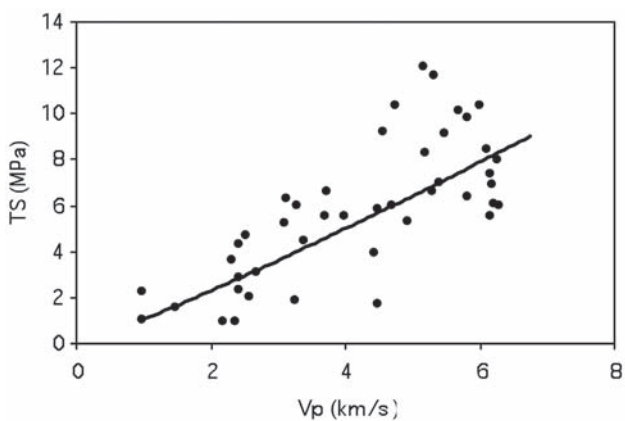


Figure 3—The relationship between the *P*-wave velocity and TS of rocks

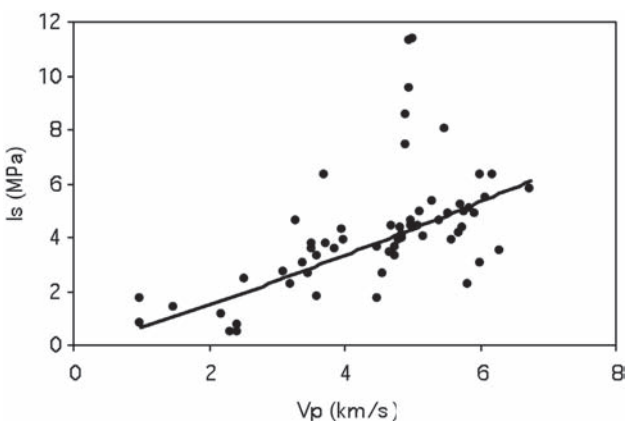


Figure 4—The relationship between the *P*-wave velocity and *I*_s of rocks

$$I_s = 0.6709V_p^{1.1556} \quad [6]$$

where *I*_s is the point load index (MPa) and *V*_{*p*} is the *P*-wave velocity (km/s). The correlation coefficient of the relation is 0.70.

There is a power relationship between Modulus of elasticity (*E*_{*t*}) and *P*-wave velocity (Figure 5). The equation of the curve is:

$$E_t = 0.919V_p^{1.9122} \quad [7]$$

where *E*_{*t*} is the modulus of elasticity (GPa) and *V*_{*p*} is the *P*-wave velocity (km/s). The correlation coefficient of the relationship is 0.79.

However, the relationships between brittleness *B*₁ and *B*₂ and *P*-wave velocity resulted in quite weak correlation coefficients, as seen in Figures 6 and 7. A power correlation between brittleness *B*₃ and *P*-wave velocity was obtained, as shown in Figure 8. The equation of the curve is:

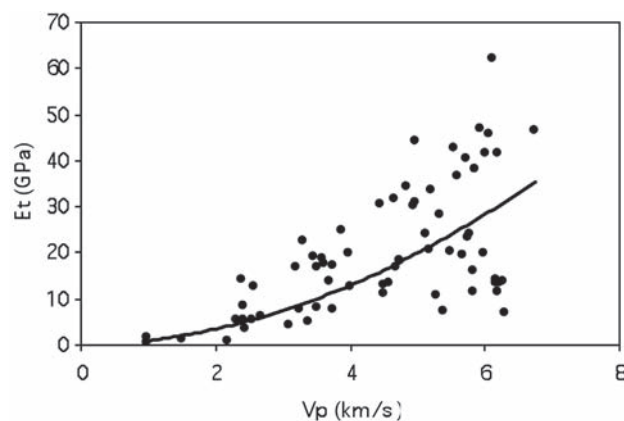


Figure 5—The relationship between the *P*-wave velocity and modulus of elasticity of rocks

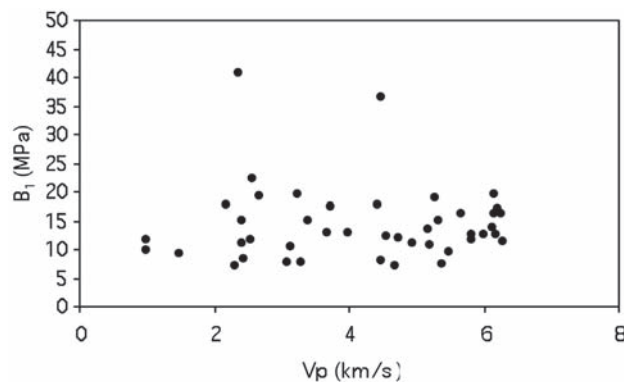


Figure 6—The relationship between the *P*-wave velocity and *B*₁ of rocks

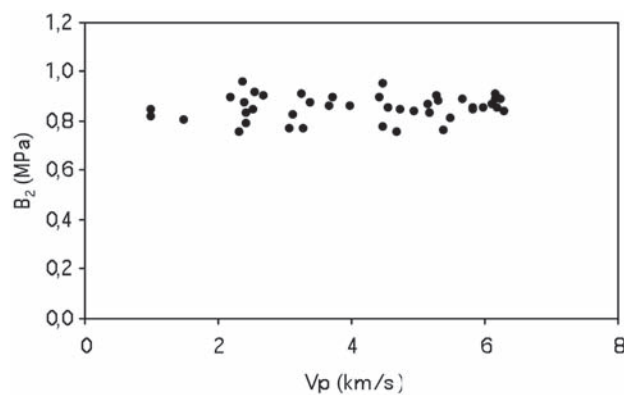


Figure 7—The relationship between the *P*-wave velocity and *B*₂ of rocks

Correlation between *P*-wave velocity and some mechanical properties

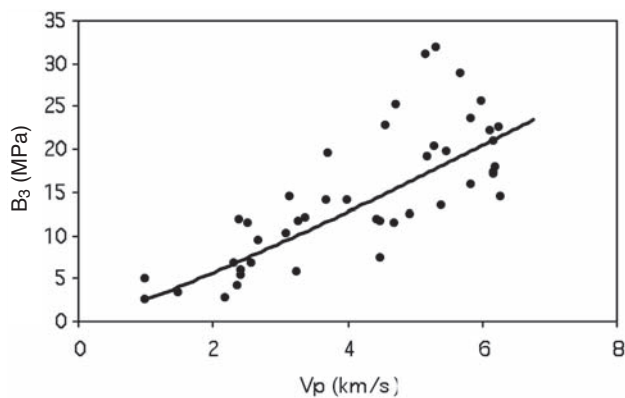


Figure 8—The relationship between the *P*-wave velocity and B_3 of rocks

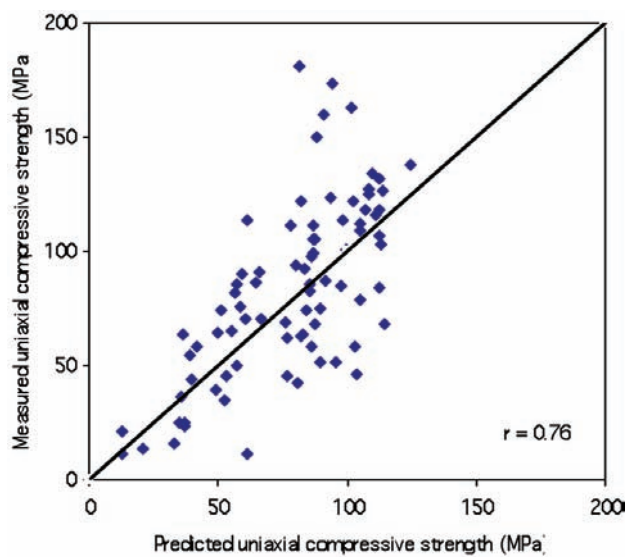


Figure 9—The relationship between the measured and predicted uniaxial compressive strength values from the simple regressions (Equation [4])

$$B_3 = 2.5554V_p^{1.1614} \quad [8]$$

where B_3 is brittleness and V_p is the *P*-wave velocity (km/s). The correlation coefficient of the relation is 0.84.

Figures 2–8 show the plots of *P*-wave velocity versus uniaxial compressive strength, tensile strength, point load index, modulus of elasticity and brittleness concepts. The results of such regressions also represented good correlations between the properties tested. Relationships are statistically significant according to the student's *t*-test with 95% confidence.

The scatter diagram of observed and estimated values of UCS of rocks is shown in Figure 9. In the plot of Equation [1], the points are scattered uniformly about the diagonal line, suggesting that the model is reasonable.

Multiple regression analysis

In the second stage of the regression analyses, a series of multiple regression analyses were performed. It may not be

always possible to predict the rock strength from a particular rock index test only, owing to the reason that rock strength parameters are a function of physical, textural, and mineralogical properties of rock.

Multiple linear regression analysis was also undertaken, including tensile strength, point load index, and *P*-wave velocity values in the model. The equations derived to estimate the uniaxial compressive strength of sedimentary rocks can be listed as follows:

$$UCS = -7.155 + 6.194 V_p + 9.774 TS \quad [9]$$

$$UCS = -10.029 + 5.734 V_p + 10.876 TS - 2.408 Is \quad [10]$$

where *UCS* is the uniaxial compressive strength (MPa), V_p is *P*-wave velocity (km/s), *TS* is tensile strength (MPa) and *Is* is point load index (MPa). The correlation coefficients are 0.88 and 0.90, respectively.

The multiple regression models to predict the uniaxial compressive strength are summarized in Tables III and IV, and the regression equations obtained are given in Equations [9–10].

The relationships between the measured and the predicted values are illustrated in Figures 10–11. As can be seen, the prediction models appear to be more reliable than that of obtained by simple regression analysis. In addition, determination of *P*-wave velocity, tensile strength, and point load index requires relatively shorter core samples than those needed for uniaxial compressive test. Hence, the predictive models obtained in this study for sedimentary rocks can be suggested as useful tools for researchers and engineers.

Conclusion

The results of simple regression analyses may suggest that the relationships between *P*-wave velocity and uniaxial compressive strength, point load index, modulus of elasticity,

Table III

Multiple regression model for the prediction of uniaxial compressive strength (coefficient of correlation is 0.88)

Independent variables	Coefficient	St. error	t-values	Sig. level
Constant	-7.155	8.761	-0.817	0.419
<i>P</i> -wave velocity	6.194	2.928	2.116	0.040
Tensile strength	9.774	1.553	6.293	0.000

Table IV

Multiple regression model for the prediction of uniaxial compressive strength (coefficient of correlation is 0.90)

Independent variables	Coefficient	St. error	t-values	Sig. level
Constant	-10.029	11.375	-0.882	0.388
<i>P</i> -wave velocity	5.734	4.731	1.212	0.238
Tensile strength	10.876	2.250	4.833	0.000
Point load index	-2.408	2.957	-0.815	0.424

Correlation between *P*-wave velocity and some mechanical properties

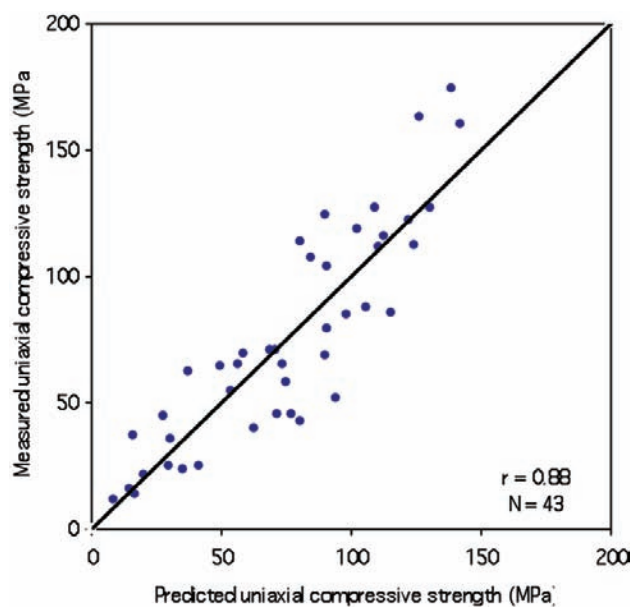


Figure 10—The relationship between the measured and predicted uniaxial compressive strength values from the multiple regression (Equation [9])

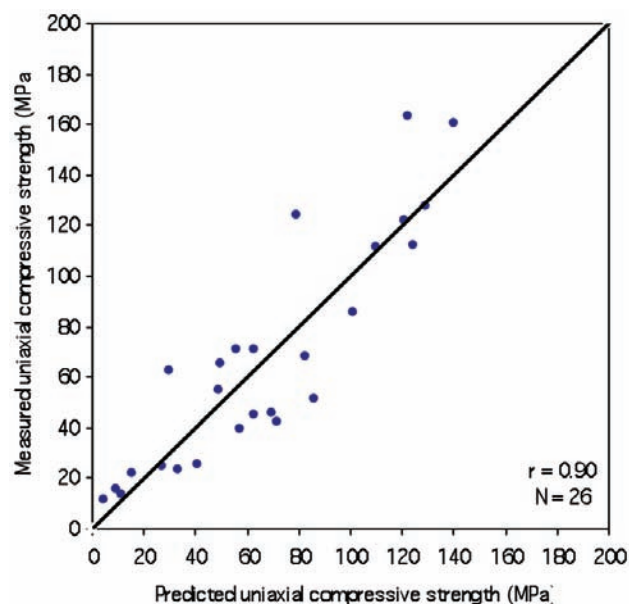


Figure 11—The relationship between the measured and predicted uniaxial compressive strength values from the multiple regression (Equation [10])

and brittleness values are meaningful. Two equations with high prediction performance were developed by multiple regression analysis for the prediction of uniaxial compressive strength.

The relationship equation between the *UCS*, *V_p*, and *TS* is:

$$UCS = -7.155 + 6.194 V_p + 9.774 TS \quad [11]$$

Equation [9] is simple and easier to use to predict the uniaxial compressive strength than other multiple regression equations.

Under certain conditions, it may be difficult and complicated to measure the uniaxial compressive strength of rocks. The use of empirical relationships to estimate the uniaxial compressive strength of rock can be more practical and economical.

The equations found in the literature are derived using the rocks from different geological origins to estimate the UCS from *P*-wave velocity. The author of this work believes that the geological origins of rocks should be taken into account separately in statistical analysis when seeking for the relationships between *P*-wave velocity and UCS of rocks.

In this way, more reliable predictions will be possible for project engineers and researchers.

References

1. PRICE, D.G., MALONE, A.W., AND KNILL, T.L. The application of seismic methods in the design of rock bolt system. *Proceedings of the First International Congress of the International Association of Engineering Geologists*, vol. 2, 1970. pp. 740–752.
2. YOUNG, R.P., HILL, T.T., BRYAN, I.R., and MIDDLETON, R. Seismic spectroscopy in traure characterization. *Quarterly Journal of Engineering Geology*, vol. 18, 1985. pp. 459–479.
3. KARPUZ, C. and PAŞAMEHMETOĞLU, A.G. Field characterization of weathered Ankara andasites. *Engineering Geology*, vol. 46, 1997. pp. 1–17.
4. ONODERA, T.F. Dynamic investigation of foundation rocks. *Proceedings of the Fifth US Symposium on Rock Mechanics*, Pergamon Press, New York, 1963. pp. 517–533.
5. GLADWIN, M.T. Ultrasonic stress monitoring tunnel underground mining. *International Journal of Rock Mechanics and Mining Sciences*, vol. 19, 1982. pp. 221–228.
6. BOADU, F.K. Fractured rock mass characterization parameters and seismic properties analytical studies. *Journal of Applied Geophysics*. vol. 36, 1997. pp. 1–19.
7. TURK, N. AND DEARMAN, W.R. A suggested approach to rock characterization in terms of seismic velocities. Proceedings of the 27th US Symposium on Rock Mechanics. Hartman H.L. (ed.). *Society of Mining Engineers*, 1986. pp. 168–175.
8. O'CONNEL, R.J. and BUDIANSKY, B. Seismic velocities in dry and saturated cracked rock. *Journal of Geophysical Research*, vol. 79, 1974. pp. 5412–5426.
9. Hudson J A, Wave speed and attenuation of elastic waves in material containing cracks. *Geophysical Journal of the Royal Astronomical Society*, vol. 64, 1981. pp. 133–150.
10. KING, M.S., CHAUDHRY, N.A., and SHAKEEL, A. Experimental ultrasonic velocities and permeability for sandstones with aligned cracks. *International Journal of Rock Mechanics and Mining Sciences*, vol. 32, 1995. pp. 155–163.
11. WATANABE, T. and SASSA, K. Velocity and amplitude of *P*-waves transmitted through fractured zones composed of multiple thin low velocity layers. *International Journal of Rock Mechanics and Mining Sciences*, vol. 32, 1995. pp. 313–324.
12. KAHRAMAN, S. A correlation between *P*-wave velocity, number of joints and Schmidt hammer rebound number. *International Journal of Rock Mechanics and Mining Sciences*, vol. 38, 2001. pp. 729–733.
13. KAHRAMAN, S. The effects of fracture roughness on *P*-wave velocity. *Engineering Geology*, vol. 63, 2002. pp. 347–350.
14. ZEZZA, F. Evaluation criteria of the effectiveness of treatments by non destructive analysis. *Proceedings of the 2nd Course of CUN University School of Monument Conservation*, Heraklion, 1993. pp. 198–207.

Correlation between *P*-wave velocity and some mechanical properties

15. CHRISTARAS, B., MARIOLAKOS, I., FOUNDOULIS, J., ATHANASIAS, S., and DIMITRIOU, A. Geotechnical input for the protection of some Macedonian Tombs in Northern Greece. *Proceedings of the 6th International Symposium Conservation of Monuments in the Mediterranean Basin*, Rhodes, 1997. pp. 125–132.
16. CHRISTARAS, B. *P*-wave velocity and quality of building materials. *Proceedings of the International Symposium Industrial Minerals and Building Stones*, Istanbul, 2003. Yuzer, E., Ergin, H., and Tugrul, A. (eds.). pp. 295–300.
17. D'ANDREA, D.V., FISCHER, R.L., and FOGELSON, D.E. Prediction of compressive strength from other rock properties, US Bureau of Mines Report of Investigations 6702, 1965.
18. DEERE, D.U. and MILLER, R.P. Engineering classification and index properties for intact rock. *Air Force Weapons Laboratory Technical Report*, AFWL-TR 65-116, Kirtland Base, New Mexico, 1966.
19. YOUASH, Y. Dynamic physical properties of rocks: part 2, experimental result. *Proceedings of the 2nd Congress of the International Society for Rock Mechanics*, vol. 1, Privredni Pregled, Beograd, Yugoslavia, 1970. pp. 185–195.
20. GARDNER, G.H.F., GARDNER, L.W., and GREGORY, A.R. Formation velocity and density: the diagnostic basis for stratigraphic traps. *Geophysics*, vol. 39, 1974. pp. 770–780.
21. LAMA, R.D. and VUTUKURI, V.S. Handbook on Mechanical Properties of Rocks. *Trans. Tech. Publications*, Clausthal, vol. 2, 1978, Germany.
22. INOUE, M. and OHOMI, M. Relation between uniaxial compressive strength and elastic wave velocity of soft rock. *Proceedings of the International Symposium on Weak Rock*, Tokyo, 1981. pp. 9–13.
23. GAVIGLIO, P. Longitudinal wave propagation in a limestone: the relationship between velocity and density. *Rock Mechanics and Rock Engineering*, vol. 22, 1989. pp. 299–306.
24. YASAR, E. and ERDOGAN, Y. Correlating sound velocity with density, compressive strength and Young's modulus of carbonate rocks. *International Journal of Rock Mechanics and Mining Sciences*, vol. 41, 2004. pp. 871–875.
25. SAITO, T., MAMORU, A.B.E., and KUNDRI, S. Study on weathering of igneous rocks, *Rock Mechanics*, Japan, vol. 2, 1974. pp. 28–30.
26. BRICH, F. The velocity of compressional waves in rocks to 10 kbars: Part 1. *Journal of Geophysical Research*, vol. 65, 1960. pp. 1083–1102.
27. BABUSHKA, V. Elastic anisotropy of igneous and metamorphic rocks. *Studia Geophysica et Geodaetica*, vol. 12, 1968. pp. 291–303.
28. KOPF, M., MÜLLER, H.J., and GOTTESMANN, B. Correlation between pyroxene content and V_p and V_s under high pressure. Kapicka, A., Kropacek, V., Pros, Z. (eds.). Physical properties of the mineral system of the Earth's Interior. *Union Czech. Math. Phys.*, Prague, 1985. pp. 168–172.
29. BABUSKA, V., PROS, Z., and FRANKE, W. Effect of fabric and cracks on the elastic anisotropy in granodiorite. *Publications of the Institute of Geophysics, Polish Academy of Sciences*, A-6 117, 1977. pp. 179–186.
30. JECH, J., BABUSKA, V., and PROS, Z. Quantitative correlation of velocity anisotropy with the distribution of microcracks in rocks. Kapicka, A., Kropacek, V., and Pros, Z. (eds.), Physical Properties of the Mineral System of the Earth's Interior. *Union Czech. Math. Phys.*, Prague, 1985. pp. 175–183.
31. KAHRAMAN, S. The effects of fracture roughness on *P*-wave velocity. *Engineering Geology*, vol. 63, 2002. pp. 347–350.
32. KAHRAMAN, S. The correlations between the saturated and dry *P*-wave velocity of rocks. *Ultrasonics*, vol. 46, 2007. pp. 341–348.
33. SINGH, T.N. and KRIPAMOY, S. Geotechnical investigation of Amiyani landslide hazard zone in Himalayan region, Uttaranchal, India. *Geotechnical Engineering for Disaster Mitigation and Rehabilitation*, 2005.
34. LAWN, B.R. and MARSHALL, D.B. Hardness, Toughness and Brittleness: An Indentation Analysis. *Journal of the Ceramic Society*, vol. 62, no. 78, 1979. pp. 347–350.
35. QUINN, J.B. and QUINN, G.D. Indentation brittleness of ceramics: a fresh approach. *Journal of Materials Science*, vol. 32, 1997. pp. 4331–4346.
36. MORELY, A. Strength of materials, Longman. Green, London, 1944. p. 35.
37. HETENYI, M. Handbook of experimental stress analysis. John Wiley, New York, 1966. p. 15.
38. RAMSEY, J.G. Folding and Fracturing of Rocks. McGraw-Hill, London, 1967. p. 289.
39. OBERT, L. and DUVALL, W.I. Rock mechanics and the design of fractures in rock. John Wiley, New York, 1967. p. 278.
40. Glossary of Geology and Related Sciences. *American Geosciences Institute*. Washington DC, 1960.
41. HUCKA, V. and DAS, B. Brittleness determination of rocks by different methods. *International Journal of Rock Mechanics and Mining Science & Geomechanics, Abstracts*, 11, 1974. pp. 389–392.
42. BARON, L.I. Determination of properties of rocks (in Russian), Gostekhizdat, Moscow, 1962.
43. COATES, D.F. Experimental criteria for classification of rock substances. *International Journal of Rock Mechanics and Mining Sciences*, vol. 3, 1966. pp. 181–189.
44. BISHOP, A.W. Progressive failure with special reference to the mechanism causing it. *Proceedings of the Geotechnical conference*, Oslo, 2, 1967. pp. 142–150.
45. RIBACCHI, R. Mechanical tests on pervasively jointed rock material: Insight into rock mass behaviour. *Rock Mechanics and Rock Engineering*, vol. 33, no. 4, 2000. pp. 243–266.
46. HAJIABDOLMAJID, V. Mobilization of strength in brittle failure of rocks, Ph.D. thesis, Queen's University, Kingston, Canada, 2001.
47. ZANG, B., BICANIC, N., PEARCE, J.C., and PHILLIPS, V.D. Relationships between brittleness and moisture loss of concrete exposed to high temperatures. *Cement and Concrete Research*, vol. 32, 2002. pp. 363–371.
48. HAJIABDOLMAJID, V. and KAISER, P. Brittleness of rock and stability assessment in hard rock tunnelling. *Tunnelling and Underground Space Technology*, vol. 18, 2003. pp. 35–48.
49. AUBERTIN, M. and GILL, D.E. Une methodologie d'evaluation du potentiel de coups de terrain dans les mines d'Abitibi. *Proc. Colloque sur le Controle de Terrain, (AMMQ)*, Val d'Or, 1988. pp. 47–77.
50. AUBERTIN, M., GILL, D.E., and SIMON, R. On the use of the brittleness index modified (BIM) to estimate the post-peak behaviour of rocks. *Rock Mechanics*. Nelson and Laubach (eds), Balkema, 1994. pp. 945–952.
51. EVANS, I. and POMEROY, C.D. The strength fracture and workability of coal. Pergamon Press, Oxford, 1966.
52. SINGH, S.P. Brittleness and the mechanical wining of coal. *Ministry of Science and Technology*, vol. 3, 1986. pp. 173–180.
53. SINGH, S.P. Criterion for the assessment of the cuttability of coal. *Underground Mining Methods and Technology*. Szwilski, A.B. and Richards, M.J. (eds.). Amsterdam: Elsevier, 1987. pp. 225–239.
54. GOKTAN, R.M. Brittleness and micro-scale rock cutting efficiency. *Mining Science and Technology*, vol. 13, 1991. pp. 237–241.
55. KAHRAMAN, S. Correlation of TBM and drilling machine performance with rock brittleness. *Engineering Geology*, vol. 65, 2002. pp. 269–283.
56. ALTINDAG, R. The role of rock brittleness on the analysis of percussive drilling performance (in Turkish). *Proceedings the Fifth Turkish National Rock Mechanics Symposium*, Isparta, Türkiye, 2000. pp. 105–112.
57. ALTINDAG, R. The evaluation of rock brittleness concept on rotary blast hole drills. *Journal of the South African Institute of Mining and Metallurgy*, vol. 102, no. 1, 2002. pp. 61–66.
58. ALTINDAG, R. Correlation of specific energy with rock brittleness concepts on rock cutting. *Journal of the South African Institute of Mining and Metallurgy*, vol. 103, no. 3, 2003. pp. 163–171.

Correlation between *P*-wave velocity and some mechanical properties

59. KAHRAMAN, S. and ALTINDAG, R. A brittleness index to estimate fracture toughness. *International Journal of Rock Mechanics and Mining Sciences*, vol. 41, 2004. pp. 343–348.
60. KAHRAMAN, S., GUNAYDIN, O., FENER, M., and BILGIL, A. Correlation between Los Angeles abrasion loss and uniaxial compressive strength. *Proceedings of the International Symposium on Industrial Minerals and Building stones*, Istanbul, Türkiye, 2003. pp. 577–581.
61. GUNAYDIN, O., KAHRAMAN, S., and FENER, M. Sawability prediction of carbonate rocks from brittleness indexes. *Journal of the South African Institute of Mining and Metallurgy*, vol. 104, no. 4, 2004. pp. 1–6.
62. YILMAZ, N.G., KARACA, Z., GOKTAN, R.M., and AKAL, C. Relative brittleness characterization of some selected granitic building stones: Influence of mineral grain size, *Construction and Building Materials*, vol. 23, 2009. pp. 370–375.
63. GOKTAN, R.M. and YILMAZ, N.G. A new methodology for the analysis of the relationship between rock brittleness index and drag pick cutting efficiency. *Journal of the South African Institute of Mining and Metallurgy*, vol. 105, 2005. pp. 727–733.
64. CHENG, H. and HU, Z.Y. Some factors affecting the uniaxial strength of weak sandstone. *Bulletin of Engineering Geology and the Environment*, vol. 62, 2003. pp. 323–332.
65. SHARMA, P.K. and SINGH, T.N. A correlation between *P*-wave velocity, impact strength index, slake durability index and uniaxial compressive strength. *Bulletin of Engineering Geology and the Environment*, vol. 67, 2008. pp. 17–22.
66. TUĞRUL, A. and ZARIF, İ.H. Correlation of mineralogical and textural characteristics with engineering properties of selected granitic rocks from Turkey. *Engineering Geology*, vol. 51, 1999. pp. 303–317.
67. ÇOBANOĞLU, İ. and ÇELİK, S.B. Estimation of uniaxial compressive strength from point load strength, Schmidt hardness and *P*-wave velocity. *Bulletin of Engineering Geology and the Environment*, vol. 67, 2008. pp. 491–498.
68. McCANN, D.M., CULSHAW, M.G., and NORTHMORE, K.J. Rock mass assessment from seismic measurements, Field Testing in Engineering Geology. Bell, Culshaw, Cripps, and Coffey (eds.). *Geological Society Publishing House, London*, vol. 6, 1990. pp. 257–266.
69. ENTWISLE, D.C., HOBBS, P.R.N., JONES, L.D., GUNN, D., and RAINES, M.G. The relationships between effective porosity, uniaxial compressive strength and sonic velocity of intact Borrowdale volcanic group core samples from Sellafeld. *Geotechnical and Geological Engineering*, vol. 23, 2005. pp. 793–809.
70. VASCONCELOS, G., LOURENÇO, P.B., ALVES, C.A.S., and PAMPLONA, J. Ultrasonic evaluation of the physical and mechanical properties of granites. *Ultrasonics*, vol. 48, 2008. pp. 453–466.
71. SOUSA, L.M.O., RIO, L.M.S., CALLEJA, L., ARGANDONA, V.G.R., and REY, A.R. Influence of microfractures and porosity on the physico-mechanical properties and weathering of ornamental granites. *Engineering Geology*, vol. 77, 2005. pp. 153–168.
72. GOKTAN, R.M. Theoretical and practical analysis of rock rippability. Ph.D. thesis, Istanbul Technical University, Istanbul, Turkey, 1988.
73. CHARY, K.B., SARMA, L.P., LAKSHMI, K.J.P., VIJAYAKUMAR, N.A., LAKSHMI, V.N., and RAO, M.V.M.S. Evaluation of engineering properties of rock using ultrasonic pulse velocity and uniaxial compressive strength. *Proceedings of the National seminar on Non-destructive evaluation*, Hyderabad, India, 2006. pp. 379–385.
74. TERCAN, A.E., UNVER, B., TIRYAKI, B., and ÖZBILGIN, D. A study of relationships among mechanical, index and petrographic properties of some sandstones using canonical correlation analysis, (in Turkish). *Mining*, vol. 44, 2005. pp. 3–14.
75. YAŞAR, E. and ERDOĞAN, Y. Yapı-kaplama kayalarının P dalga hızı ile fiziko-mekanik özellikleri arasındaki ilişkilerin istatistiksel analizi (in Turkish), Türkiye IV. Marble Sempoium (Mersem'2003), 2003. pp. 353–362.
76. ZUKUI, L., XINXU, Z., JINHAI, Z., DAIXU, T., YONGSONG, T., JING, Y., and YANQING, L. The experiment investigation of the correlation of acoustic logging and rock mechanical and engineering characteristics. *Frontiers of Rock Mechanics and Sustainable Development in the 21st Century*. Sijing, Bingjun, Zangkui (eds.), 2001. pp. 89–92.
77. KILIÇ, A. AND TEYMEN, A. Determination of mechanical properties of rocks using simple methods, *Bulletin of Engineering Geology and the Environment*, vol. 67, 2008. pp. 237–244.
78. MATSUI, K. and SHIMADA, H. Rock impact hardness index for predicting cuttability of roadheader, *Mine Mechanization and Automation*, 1993. pp. 265–270.
79. Karakus M, Kumral M, Kilic A, Predicting elastic properties of intact rocks from index tests using multiple regression modelling. *International Journal of Rock Mechanics and Mining Sciences*, vol. 42, 2005. pp. 323–330.
80. BASARIR, H. and KARPUZ, C. A ripability classification system for marls in lignite mines. *Engineering Geology*, vol. 74, 2004. pp. 303–318.
81. TECEN, O. and FOWELL, R.J. Hybrid rock cutting: fundamental investigations and practical applications. *Proceedings of the Second US Water Jet Conference*. Summer, D.A. and Haston, F.F. (eds.), Missouri-Rolla, 1983. pp. 368–380.
82. DEMOU, S.G., OLSON, C.R., and WINGQUIST, C.F. Determination of bit forces encountered in hard rock cutting for application to continuous design. *US Bureau of Mines*, RI 8748, 1983. p. 24.
83. ZARIF, İ.H. and TUĞRUL, A. Aggregate properties of Devonian limestones for use in concrete in Istanbul, Turkey. *Bulletin of Engineering Geology and the Environment*, vol. 62, 2003. pp. 379–388.
84. LASHKARIPOUR, G.R. A statistical investigation on mudrocks. *ISRM Regional Symposium- Advancing Rock Mechanics Frontiers to Meet the Challenges of 21st Century*, II-79-II84, 2002.
85. BASARIR, H., KARPUZ, C., and BOZDAG, T. Rippability assessment studies at tuncbilek coal mine: a case study. Panagiotou and Michalakopoulos (eds.). *Proceedings of the Ninth International Mine Planning and Equipment Selection*, Nov. Balkema, Rotterdam, 2000. pp. 515–520.
86. KAHRAMAN, S., BALCI, C., YAZICI, S., and BILGIN, N. Prediction of the penetration rate of rotary blast hole drills using a new drillability index. *International Journal of Rock Mechanics and Mining Sciences*, vol. 37, 2000. pp. 729–743.
87. ERSOY, A and ATICI, U. Correlation of P and S-waves with cutting specific energy and dominant properties of volcanic and carbonate rocks. *Rock Mechanics and Rock Engineering*, vol. 40, 2007. pp. 491–504.
88. HUANG, S.L. and WANG, Z.W. The mechanics of diamond core drilling of rocks. *International Journal of Rock Mechanics and Mining Sciences*, vol. 34, nos. 3–4, 1997.
89. BALCI, C. and BILGIN, N. Mekanize kazı makinalarının seçiminde küçük ve tam boyutlu kazı deneylerinin karşılaştırılması, (in Turkish). *ITU Dergisi/d, Mühendislik*, vol. 4, 2005. pp. 76–86.
90. HOLMGEIRSDOTTIR, T.H. and THOMAS, P.R. Use of the D-762 Shore hardness scleroscope for testing small rock volumes. *International Journal of Rock Mechanics and Mining Sciences*, vol. 35, 1998. pp. 85–92.
91. HOWARTH, F.D., ADAMSON, W.R., and BERNDT, J.R. Correlation of model tunnel boring and drilling machine performances with rock properties. *International Journal of Rock Mechanics and Mining Sciences*, vol. 23, 1986). pp. 171–175. ◆